


Electric Dropbolts

Drop-bolt with Door Status Signal Output & Lock Status Indicator

Model EDB-D5C-TC

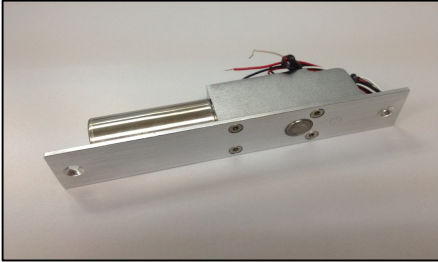

Description

Solenoid bolt is a flush mount type of electro-mechanical locking mechanism which is characterized by the use of a solenoid to throw the bolt. Designed for use in double acting doors and can be installed on inward-swinging or outward-swinging doors.

Standard Features

- Fail Safe. Locked When Energized, with magnetic induction.
- Door Status Signal NC Output.
- Lock Status LED Indicator.
- Time Delay Feature - 0/3/6/9 seconds
- Single Voltage - 12Vdc.
- Suitable for all kind of doors with frame and 90/180 degree to open doors.
- Applicable for glass door with mounting brackets.

Specification

	EDB-D5C-TC
Lock size	200 (L) x 35 (W) x 38 (H) mm
Strike plate size	100 (L) x 30 (W) x 20 (H) mm
Lock tongue size	Φ15 x 15 mm
Input voltage	12VDC
Starting Current	650mA
Standby Current	250mA
Low current draw	4.5W
Working Temperature	-20~55°C

DISCLAIMER:- Specifications are subject to change without prior notice.

- Attached photo is for reference purpose only, actual product may varies.

